




DEKO PF

最新的实体系统隔断墙

Profile Free System Partition

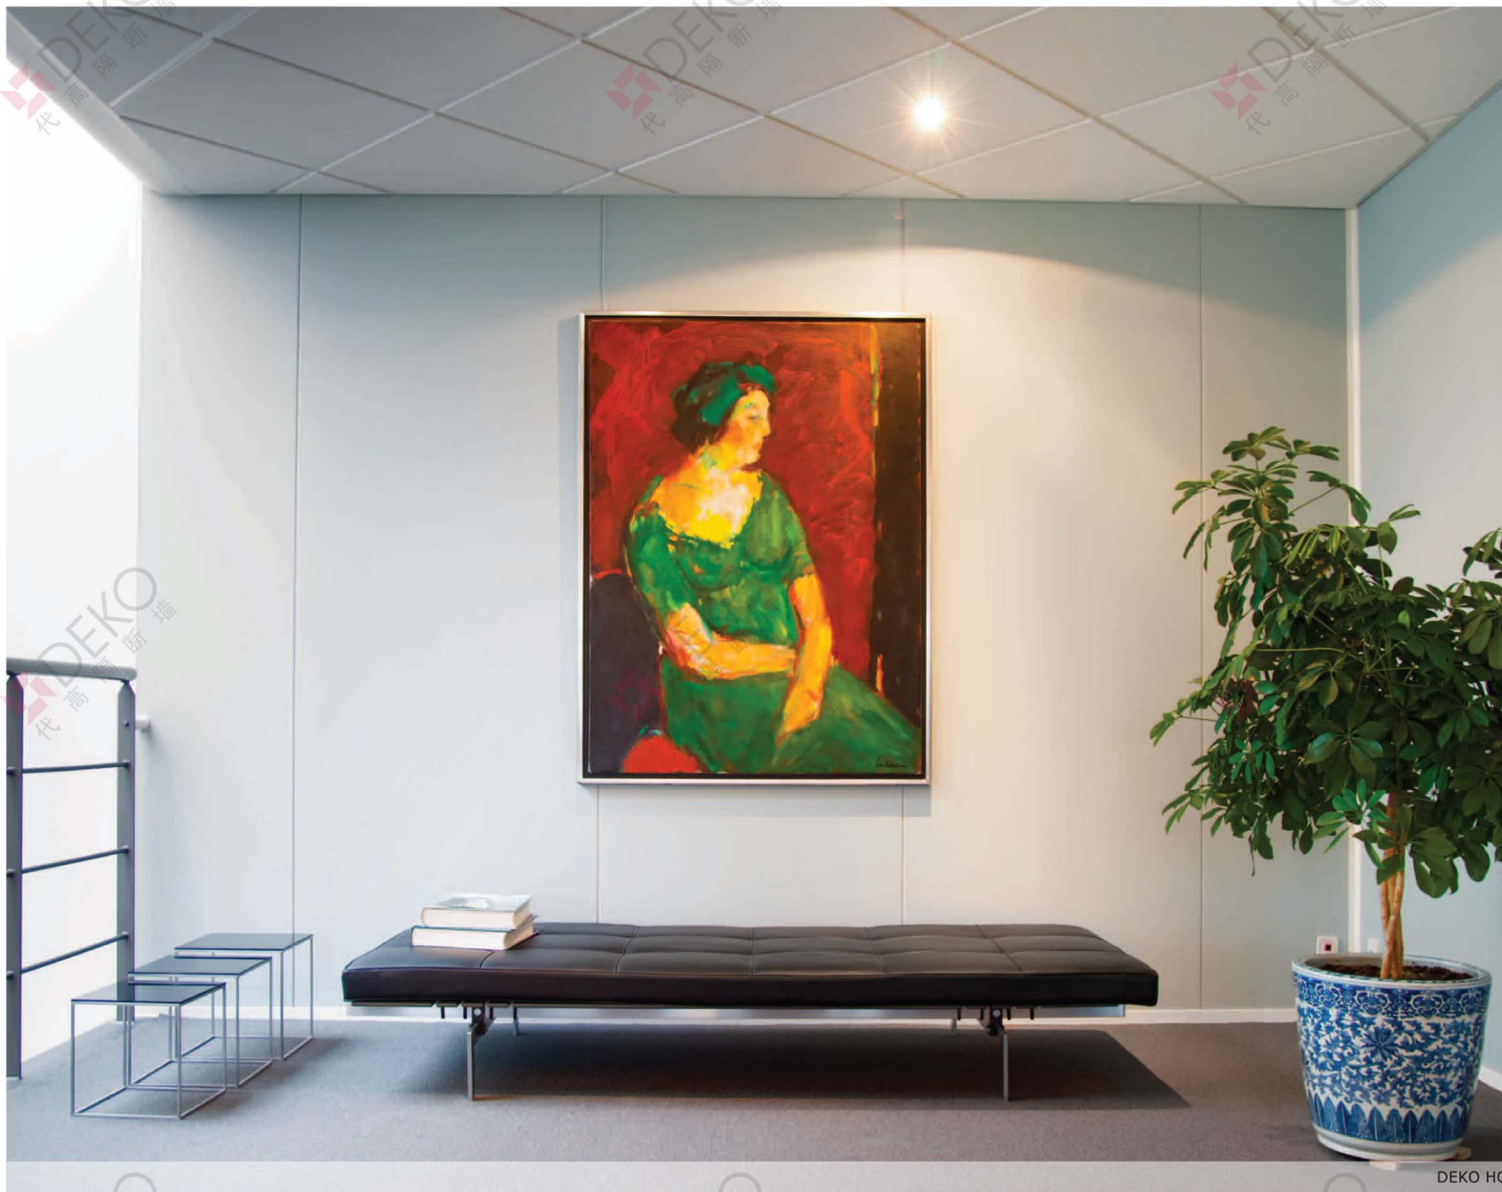

DEKO PF - Profile Free System Partition 代高PF 无压条系统隔断墙

代高PF是无压条系统隔断墙。它的构造和代高PV接近。只是去除了面板之间的垂直外压条。面板之间的接缝处使用了斜边拼合处理。使得整个隔断墙的外观非常简单清爽。

对最小细节的充分关注，使代高PF成为完美的选择。预制的代高PF隔断墙具有令人满意的抗撞击强度和稳定性。另外，它的组装非常简单，价格也更具竞争力。

DEKO PF is a profile free system partition which is constructed in the same way as DEKO PV with the slim aluminium profiles being replaced with bevel edge joint, giving the partition a minimalistic appearance. DEKO PF is the perfect choice where minimal detailing is important: it is a ready-made partition giving desirable strength and stability ratings. In addition, it is easily installed and the price is more competitive.

DEKO HQ



DEKO HQ

Detailed Design - Ready to Install 细节的设计

代高系列隔断墙在全球的施工安装使用已有几十年的历史。成功的秘诀在于产品的灵活性、可利用率和提供有竞争力的服务。

代高PF作为新型成品实体墙。面板之间的接缝处使用了斜边拼合处理为石膏板之间垂直节点。使得隔断墙的完成表面非常吸引人。


代高PF由钢制框架组成内部结构，表面的石膏板使用特别制造的紧固件固定在钢结构框架上。插座和其他配件，如书架、图片和白板，都可以直接固定在隔断墙上。

DEKO system partitions have been installed worldwide for many years. This success is due to the flexibility and competitive service provided by DEKO. DEKO PF is supplied as a ready-made drywall finished with discrete V-joints forming the vertical joints of the gypsum boards, which gives the partition an attractive finish. DEKO PF consists of individual components based on a steel framework. The facing gypsum board is fastened to the steel framework with specially developed concealed clips.

A Wide Variety of Surface Finishes 表面的多样

代高PF的适用范围很广。通常表面都贴有可清洗的乙烯基材料。这层耐用的表面材料使得隔断墙持久耐用并且外形美观。贴有装饰性材料的石膏板在缩短施工周期方面起到非常重要的作用。

如果需要的话，我们也可以在表面做其他处理，来达到与室内现存表面的协调一致。

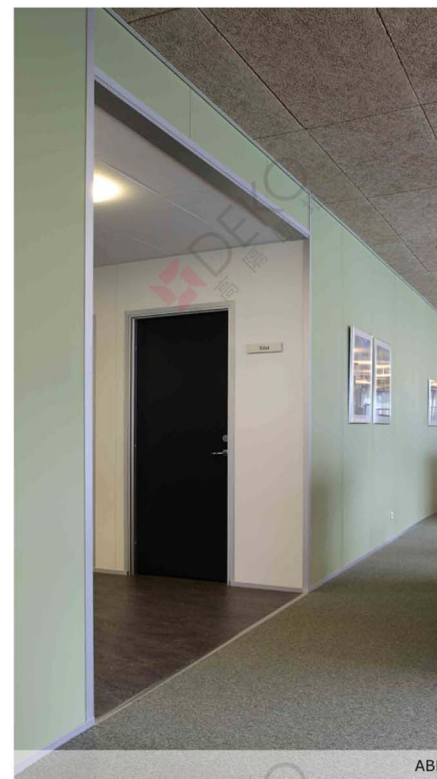

ABB



Bearing Point Copenhagen

DEKO PF is used in a wide variety of interiors. All gypsum boards are pre-decorated with washable vinyl surfaces. Due to their robust surface the partitions are durable and offer an attractive finish. Painted felt or a woven textile finish can also be supplied to match existing surfaces where required.



Vestergaard Auto

DEKO Doors 门页的选择

代高门页被安装在代高特制的门框上。门页可选择实体、有框玻璃、或者全玻璃的门。单开或者双开门页是以标准尺寸提供的。也可根据要求提供非标准门页。

代高门可以在已建好的砖墙、混凝土墙和干法墙中进行安装，这样，门就能够在整个建筑中做到统一。

DEKO Doors are installed in the unique DEKO aluminium frame. Doors can be solid, glazed, or fully glazed, etc. Single or double leaf doors are available in standard sizes. Non-standard sizes can also be provided.


DEKO Doors can be fitted into existing brick, concrete, and drywalls, so that doors can be standardised throughout the building.



Europahuset



ABB

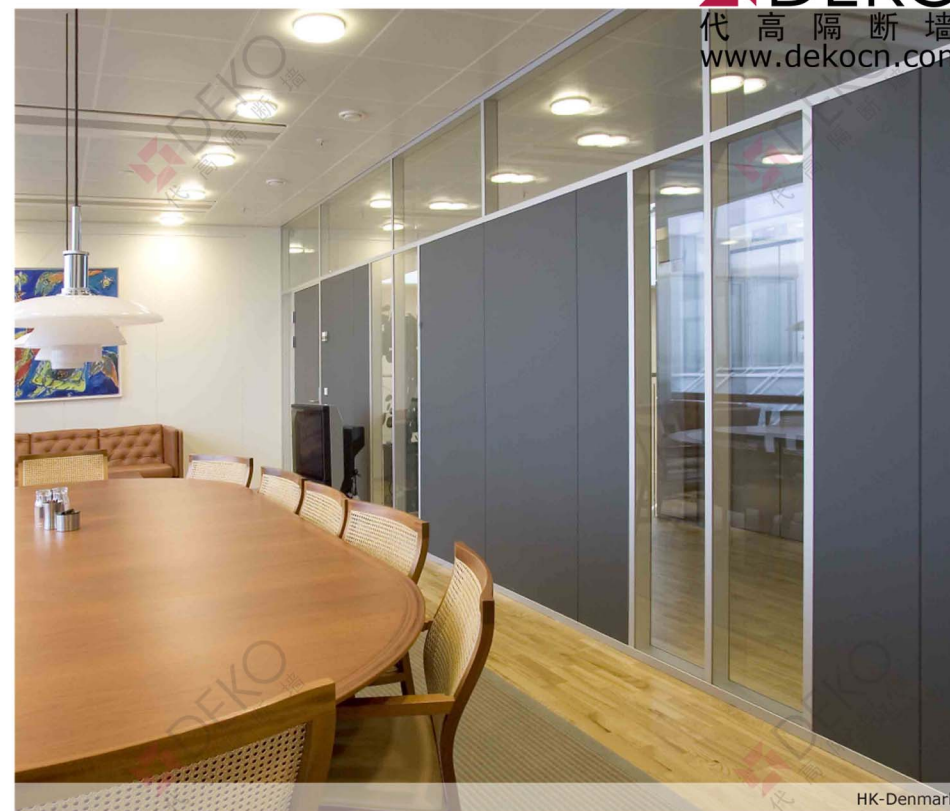

HK-Denmark


Creating Safe Working Environments 营造安全的工作环境

我们不断地对代高系列隔断墙进行测试和改进，这样做是为了确保产品始终能够达到最新的国际检测标准，包括隔音、防火和环保等方面。不同厚度和品种的代高PF隔断墙可满足不同的需求。

代高PF系统隔断墙的防火测试时间超过60分钟，隔音系数最高可达到58分贝。关于防火和隔音方面的具体情况，可查看ETA认证。

代高PF系统隔断墙也获得了室内环保标志。

DEKO system partitions are constantly tested and developed in order to ensure compliance with the latest international standards for sound reduction, fire resistance, and indoor climate. DEKO PF is produced in different thicknesses and varieties according to individual requirements. DEKO PF system partitions are fire tested up to 60 minutes and sound tested up to Rw 58 dB. Fire and sound technical qualities can be found on DEKO's ETA-approval. DEKO PF system partitions have also been awarded the Danish Indoor Climate Label.

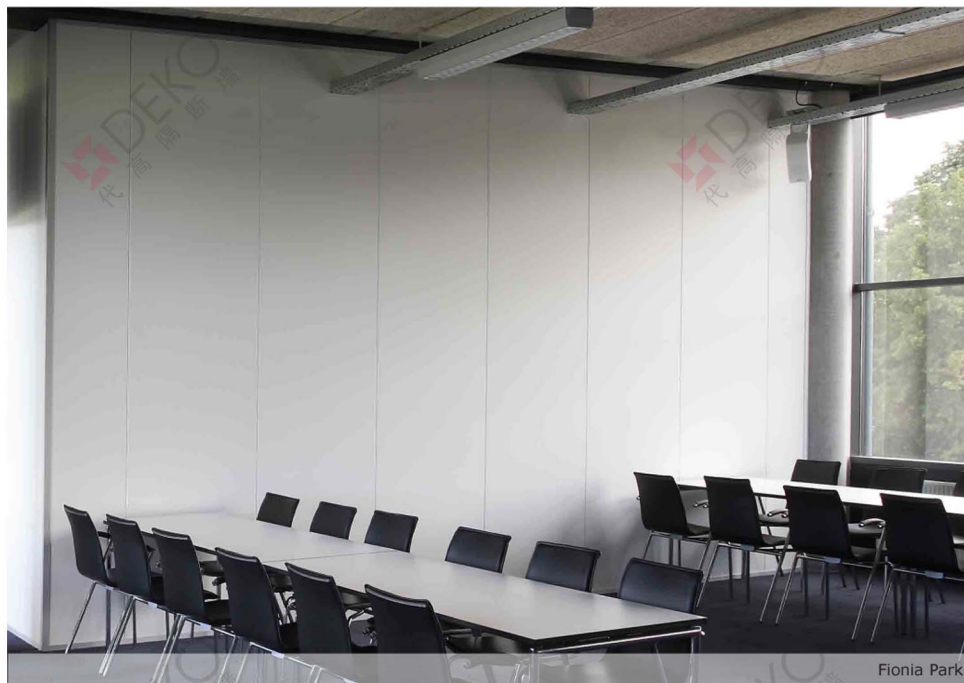

Technical Data 技术数据

内部结构 Inside Structure

精确制造的镀锌钢制支撑 Hot Galvanized Steel Profile

外部框架 Outer Frame

仅在四周有铝合金型材收边 High-grade Aluminium Profile

内腔填充 Cavity Filling

50mm板状隔音防火岩棉或类似材料 Mineral Wool

面板装配 Panel Assembly

代高特供的实体面板 Decorated Gypsum Boards

耐火极限 Fire Resistance

E30、EI60、EI90 (ISO834)

抗撞强度 Impact Resistance

400Nm、500Nm (ISO7892)


隔音载数 Airborne Sound Insulation

44dB、51dB、58dB (ISO140)

环保标准 Environmental Certificate


10 DAYS

Details for DEKO PF 代高PF 常规节图

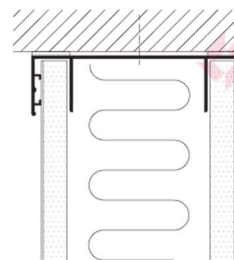


Conventional Fixed Connection

常规固定连接

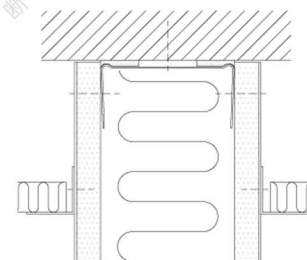


Fixed Ceiling Connection

上顶固定连接




T-connection

T型连接




Floor Connection

地面固定连接




90° Corner

90°转角




Solid Door and Doorframe

实体门和门框




Gypsum Board Joint of Type 1090

1090石膏板直撑连接



Gypsum Board Joint of Type 1290

1290石膏板直撑连接



Gypsum Board/Glass Joint

石膏板/玻璃直撑连接



DEKO
代高隔断墙

Maarkaervej 11-2630 Taastrup
Tel : +43 55 77 11
Fax: +43 55 77 13

Koholm4-6000kolding
Tel : +75 51 77 22
Fax: +75 51 77 50

E-mail: info@deko.dk-www.deko.dk

全国服务热线: 800-988-0610

Local distributor :

